



INCOM-LTE | Inaxsys Alarm LTE Communicator

UNIFY YOUR SECURITY SOLUTION

Incomlink represents the state of art in communicators.

Easy to install with a simple user interface, the INCOM-LTE interprets Contact-ID protocol and forwards the message in SIA DC 09 format to the monitoring station IP receiver through the TCP/IP network.

Features

- ☞ Web browser or USB connection for setup and configuration
- ☞ Remote serial connection for almost any security or fire alarm control panel
- ☞ Status LEDs
- ☞ Minimum communication cost
- ☞ High-tech LTE Network connection
- ☞ Fully customizable Contact ID messages

Properties

INCOM-LTE	
Cellular Bands	LTE (B1/B3/B7/B8/B20/B28A)
Loop Current	25mA
Power	9-30V DC
Impedance	100-470 Ohm
Dial tone	425 Hz
Line voltage	48V
Operating Temperature	0°C to +70°C
Dimension	75 mm x 80 mm x 25 mm


*Click here to access the documentation.

Overview



- 1. Terminals for Alarm panel connection
- 2. Antenna connector (LTE)
- 3. Service Button
- 4. QR Code for the communicator's data sheet
- 5. Serial connector for remote programming
- 6. Mini USB-B port for setup
- 7. Status LED
- 8. SIM Card slot

Wiring diagram

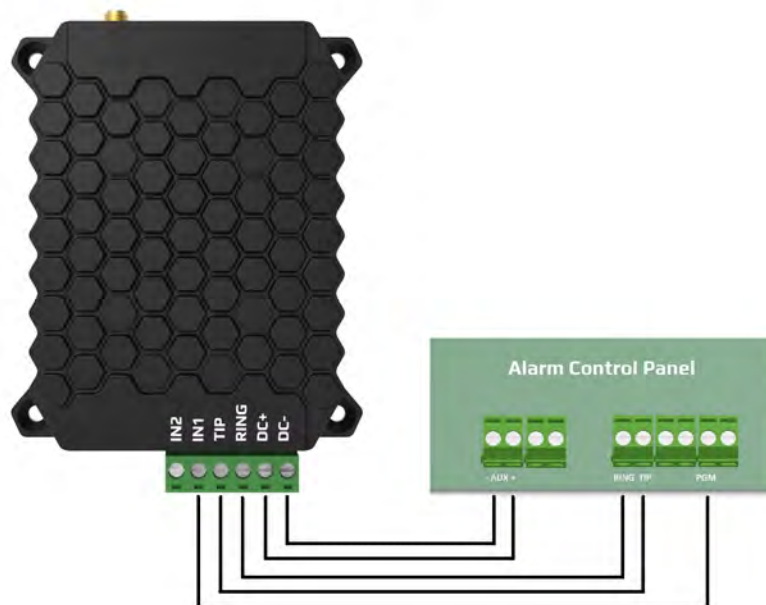

*Design and specifications are subject to change without notice.