

INLG32164KN

32 CHANNEL 4K NVR W/16 POE PORTS

- Supports H.265+ / H.265 / H.264 compression
- 32-Channel input
- Up to 12 Megapixels resolution recording
- HDMI and VGA simultaneous output
- 4 SATA HDDs, Up to 10TB for each HDD
- Plug & Play with 16 independent PoE network interfaces
- Supports cloud upgrade




NDAA
Compliant

Unify your Security Solution

You asked, we listened. Tailored especially for you, Legend is our **fully NDAA compliant brand**. It offers our latest technologies in a robust build. Legend by Inaxsys provides H.265+ compression, highly reliable device, crystal clear imaging, easy-to-use, this NVR is **suitable for residences and businesses**.

Rear Panel

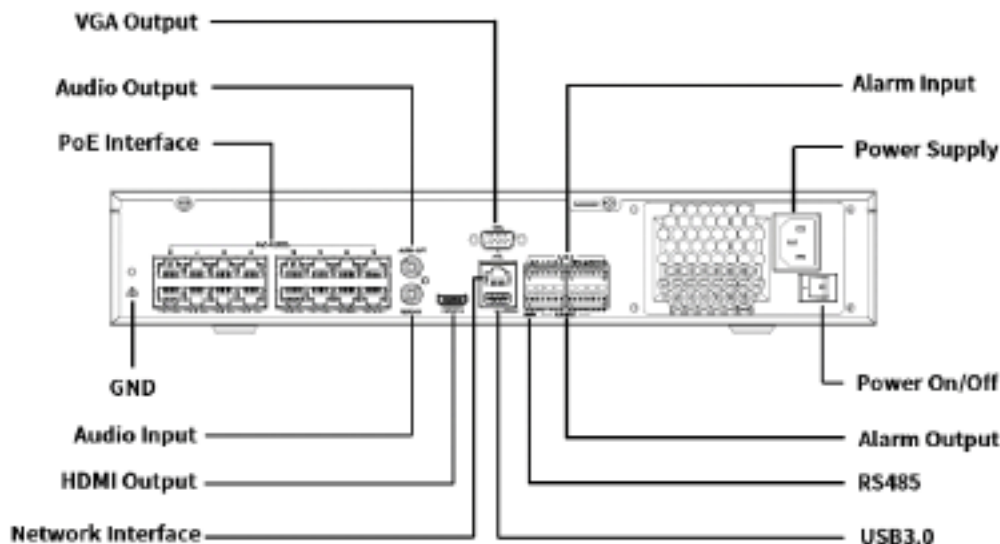

*Design and specifications are subjects to change without notice.



INLG32164KN

32 CHANNEL 4K NVR W/16 POE PORTS

Product Specifications

| System | |
|-----------------------------------|--|
| IP Video Input | 32-Channel |
| Two-way Audio Input | 1-Channel, RCA |
| Network | |
| Incoming Bandwidth | 320Mbps |
| Outgoing Bandwidth | 320Mbps |
| Remote Users | 128 |
| Protocols | TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE, HTTP, HTTPS, DNS, DDNS, SNMP, SMTP, NFS |
| Video/Audio Output | |
| HDMI/VGA Output | HDMI: 4K (3840x2160)/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz |
| | VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz |
| Recording Resolution | 12MP / 8MP / 6MP / 5MP / 4MP / 3MP / 1080p / 960p / 720p / D1 / 2CIF / CIF |
| Audio Output | 1-Channel, RCA |
| Audio Compression | G.711A, G.711U |
| Synchronous Playback | 16-Channel |
| Live View Display | 1 / 4 / 6 / 8 / 9 / 16 / 25 / 36 |
| Corridor Mode Screen | 3 / 4 / 5 / 7 / 9 / 10 / 12 / 16 / 32 |
| Decoding | |
| Decoding Format | H.265+ / H.265 / H.264 |
| Liveview/Playback | 12MP / 8MP / 6MP / 5MP / 4MP / 3MP / 1080p / 960p / 720p / D1 / 2CIF / CIF |
| Capability | 1-Ch x 12MP at 30 2-Ch x 4K at 30, 5-Ch x 4MP at 30, 10-Ch x 1080P at 30, 22-Ch x 720P at 30, 32-Ch x D1 |
| Hard Disk | |
| SATA | 4 SATA interfaces |
| Storage | up to 10TB for each HDD (The maximum HDD capacity varies with environment temperature) |
| Disk Group | Supported |
| RAID | RAID1, 5 |
| Smart Features | |
| Video Content Analytics by Camera | Intrusion Detection, Cross Line Detection, Enter Area, Leave Area, Defocus Detection, Scene Change, Detection, Object Left Behind, Object Removed, Auto Tracking |
| Video Content Analytics Search | Behavior Search, Vehicle Search |
| People Counting | People Flow Counting, Crowd Density Monitoring |
| Smart Intrusion Prevention | 8-Channel |

*Design and specifications are subjects to change without notice.




INLG32164KN

32 CHANNEL 4K NVR W/16 POE PORTS

Product Specifications

| External Interface | |
|----------------------|--|
| Network Interface | 1 RJ45 10M/100M/1000M self-adaptive Ethernet Interfaces |
| Serial Interface | 1 x RS485 |
| USB Interface | Front panel: 1 x USB2.0, Rear panel: 1 x USB3.0 |
| Alarm In | 16-Channel |
| Alarm Out | 4-Channel |
| Disk Array | |
| General Alarm | Motion, Tampering, Human Body Detection, Video Loss, Input Alarm, Audio Detection |
| Alert Alarm | IP Conflict, Network Disconnected, Disk Offline, Disk Abnormal, Illegal Access, Hard Disk Space Low, Hard Disk Full, Recording/Snapshot Abnormal |
| Certifications | |
| Certification | CE, FCC, UL, RoHS, WEEE |
| CE | EN 55032: 2015, EN 61000-3-3: 2013, EN IEC 61000-3-2: 2019, EN 55035: 2017 |
| FCC | Part15 Subpart B, ANSI C63.4 |
| General | |
| Power Supply | 100 ~ 240V AC Power Consumption: ≤ 50 W (without HDD) |
| PoE Interface | 16 RJ-45 10M/100M self-adaptive Ethernet Interface |
| Max Power | Max 30W for single port Max 150W in total |
| Supported Standard | IEEE 802.3af/at |
| Working Environment | -10°C to +55°C (+14°F to +131°F), Humidity ≤ 90% RH |
| Chassis | 19-inch rack-mounted 3U chassis |
| Dimensions (WxDxH) | 400mm × 363mm × 74mm (15.7" × 14.3" × 2.9") |
| Weight (without HDD) | Less than 4Kg (8.82lb) |

Dimensions

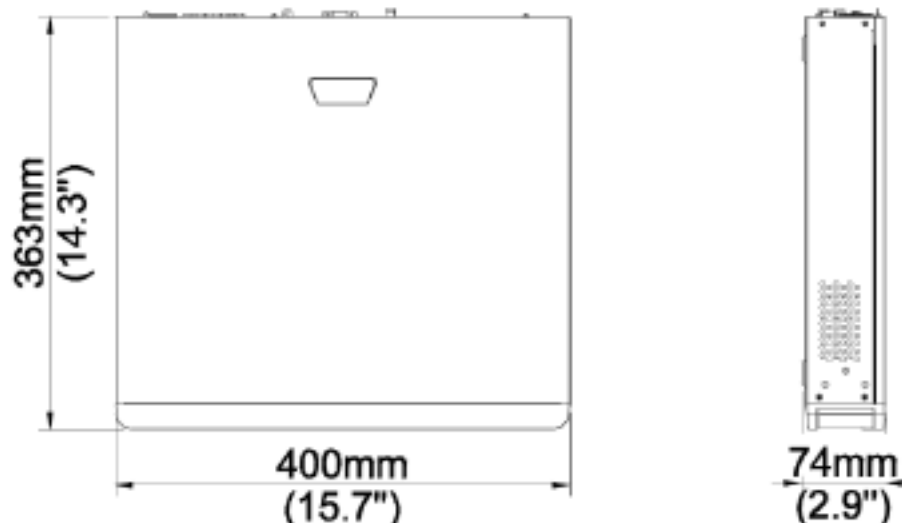

*Design and specifications are subjects to change without notice.

