


## 4-Port PoE Switch with 2 Upload ports

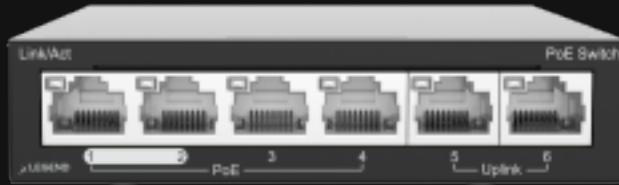

Specifications	
Ports	6x100Mbps network ports (RJ45), including 4 PoE ports
Standards	IEEE802.3, IEEE802.3u, IEEE802.3az, IEEE802.3x, IEEE802.3af, IEEE802.3at
Switching capacity	1.2Gbps
Forwarding performance	0.90Mpps
Packet Buffer	448Kbit
MAC	1K
General	
Dimension (H*W*D)	108mm x 100mm x 25.5mm
Weight	0.19KG
Power supply	DC: 48/51V
PoE	802.3at/af (4/5+, 7/8-)
Max. PoE Power	Max capacity: 60W Max capacity for single port: 30W
Prior Ports	1~2
Cooling Fans	0
Operating temperature	0°C - 40°C (32°F - 104°F)
Operating humidity	10% - 90% (non condensing)
Storage humidity	5% - 90% (non condensing)
Indicators	
Power	Steady on: AC input is normal Off: No AC input
PoE Indicator	None
PoE-Max	Off: The POE power supply power of the whole machine is less than 80% of the specification Steady on: The POE power supply power of the whole machine is greater than 85% of the specification
Link/Act	Off: No link Steady on: Linked Flashing: Transmitting data
Additional Info	
Working Mode	Default(Normal mode): All ports can communicate with each other. EXTEND(Surveillance mode): Transmission distance up to 250 meters.

\*Design and specifications are subjects to change without notice.