

INLGDO4IRA

4.1 MP Vandal Proof Motorized Lens Dome Network Camera w/IR, SD Slot

- Incredible 4MP Auto Focus Lens; ready-to-operate!
- H.265+ & H.264 encoding
- Smart IR, Up to 30 m (98ft) IR distance
- Increased infrared transmittance IR anti-reflection window
- Supports Micro SD Card, up to 256GB



NDAA
Compliant

Unify your Security Solution

You asked, we listened. Tailored especially for you, Legend is our **fully NDAA compliant brand**. It offers our latest technologies in a robust build with edge storage capacity. Legend by Inaxsys provides H.265+ compression and easy installation.

Smart H.265+ & H.264+

LEGEND smart encoding technology provides high-quality video with higher efficiency and also reduces the cost of storage space and transmission bandwidth by adopting an advanced algorithm of auto stream control.

On-board Analytics

This camera responds accurately to specific events in a given area. Our algorithm enables Human detection, intrusion detection, motion detection and much more. Facilitate your viewing experience using on the edge analytics – one product, multiple features.



*Design and specifications are subjects to change without notice.



INLGDO4IRA

4.1 MP Vandal Proof Motorized Lens Dome Network Camera w/IR, SD Slot

Product Specifications

Camera					
Image Sensor	1/3", 4 Megapixel, progressive scan, CMOS				
Scanning System	Progressive				
Electronic Shutter Speed	Auto/Manual, 1~1/100,000 s				
Minimum Illumination	Color: 0.01 Lux (F1.6, AGC ON); 0 Lux with IR				
IR Distance	Distance up to 30m (98ft)				
Camera Features					
Day/Night	IR-cut filter with auto switch (ICR)				
Smart IR	Support				
White Balance	Auto/Outdoor/Fine Tune/Sodium Lamp/Locked				
Backlight Compensation	Supported				
Noise Reduction	2D/3D DNR				
Features	HLC; BLC; DWDR				
Flip	Normal/Vertical/Horizontal/180°				
Privacy Masking	Up to 4 areas				
OSD	Up to 4 OSDs				
Region of Interest	Up to 2 areas				
Motion Detection	Up to 4 areas				
Defog	Digital Defog				
Lens					
Lens Type	Motorized zoom lens				
Focal Length	2.8 ~ 12mm				
Max. Aperture	N/A				
Viewing Angle	H: 106.9° ~ 28.4°; 55.3° ~ 16.4°; O: 138.9° ~ 34.9°				
Iris Type	N/A				
Pan/Tilt/Rotate	Pan: 3° ~ 360°; Tilt: 0 ~ 80°; Rotate: 0 ~ 360°				
DORI Distance	Lens (mm)	Detect (m)	Observe (m)	Recognize (m)	Identify (m)
	2.8	63.0	25.2	12.6	6.3
	12	270	108	54	27
Video					
Compression	H.265+, H.265, H.264, MJPEG				
H.264 code profile	Baseline Profile, Main Profile				
Video Bit Rate	128 Kbps~16 Mbps				
Frame Rate	Main Stream: 4MP (2592*1520), Max 20fps; Sub Stream: 720P (1280*720), Max 20fps; Third Stream: D1 (704*576), Max 20fps				
Storage					
Edge Storage	Micro SD, up to 256GB				
Network Storage	ANR				

*Design and specifications are subjects to change without notice.



INLGDO4IRA

Product Specifications

4.1 MP Vandal Proof Motorized Lens Dome Network Camera w/IR, SD Slot

Network	
Ethernet	1 RJ45 10M/100M Base-TX Ethernet
Protocol	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SSL, QoS
Compatibility	ONVIF (Profile S, Profile G, Profile T), API
Management Software	LEGEND VMS / ARKIV
Web Browser	Live view with plug-in required: Firefox 52 and below, Chrome 41 and below, IE9+
	Live view without plug-in: Firefox 58.0+, Chrome 57.0+, Edge 16+, Safari 11+
Certifications	
Certifications	CE: EN 60950-1 UL: UL60950-1 FCC: FCC Part 15
General	
Power Supply	DC 12V±25%, PoE (IEEE 802.3af)
Power Consumption	Less than 7W
Working Environment	-40°C to 60°C (-31°F to 140°F) / Less than 95% RH
Material	Metal + Plastic
Vandal & Ingress & Surge Protection	IK10; IP67; 6KV
Weight	2.0 lb (0.92kg)
Dimensions	Φ148 x 111.3mm (Ø5.8" x 4.4")


*Design and specifications are subjects to change without notice.



INLGDO4IRA

4.1 MP Vandal Proof Motorized Lens Dome Network Camera w/IR, SD Slot

Product Specifications

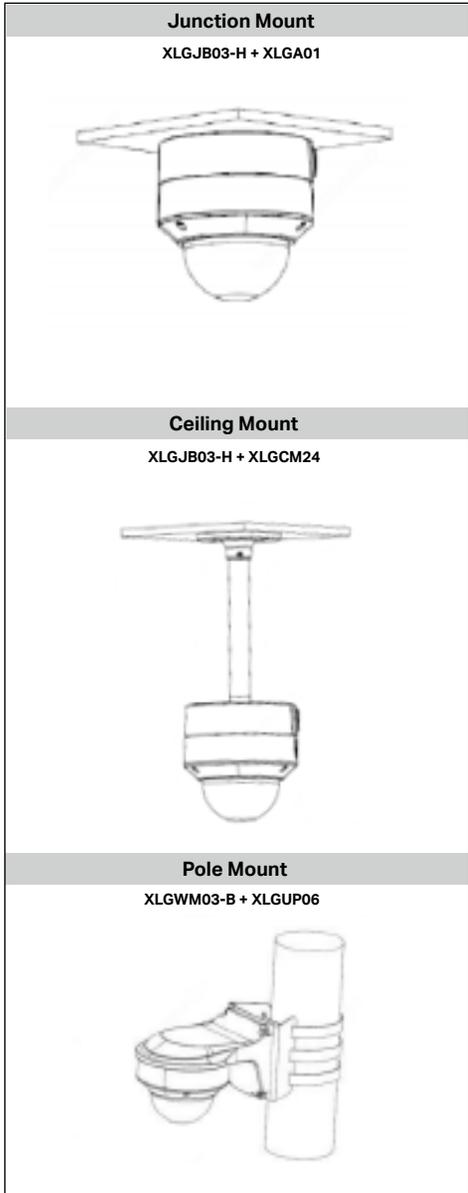

XLGJB03-H
Junction Box



XLGA01
Waterproof Joint



XLGJB07/WM03-F
Wall Mount Combo



XLGCM24
Ceiling Mount



XLGWM03-B
Wall Mount



VUSD256G
Micro SD Card



XLGUP06
Pole Mount

*Design and specifications are subjects to change without notice.

