

INSNCTO4WCA

4.1 MP HD over Coax Turret Camera with IR

- 4MP, 1/1.8" CMOS image sensor, Starlight+
- Max. Resolution 4MP (2688 × 1520) at 30 fps
- Starlight+, 120dB true WDR, 3DNR
- 3.7-11mm motorized lens
- Audio in interface, built-in mic

Unify your Security Solution

Long-distance and real-time transmission without any loss. It supports up to 700m for 1080P Full HD video via coaxial cable, and up to 300m via UTP cable.

HD over Coax

The HD over Coax technology can support up to 4 signals transmitted over coaxial cable. With the dual-way data transmission the HD over Coax camera can interact with the STORM DVR by alarm triggers or control signals.

Wide Dynamic Range

This camera offers vivid imaging in any scenario. Using industry-leading WDR technology, you'll be able to capture the subject in the most contrast lighting conditions.

HD over Coax



*Design and specifications are subjects to change without notice.



INSNCTO4WCA

4.1 MP HD over Coax Turret Camera with IR

Product Specifications

Camera					
Image Sensor	1/1.8" 4 Megapixel progressive CMOS				
Effective Pixels	2560(H) × 1440(V)				
Scanning System	Progressive				
Electronic Shutter Speed	PAL: 1/25~1/100,000s NTSC: 1/30~1/100,000s				
Minimum Illumination	0.002 Lux / F1.9, 30IRE, 0 Lux IR on				
S/N Ratio	More than 65 dB				
IR Distance	Up to 60m (197feet)				
IR LEDs	2				
Camera Features					
Day/Night	Auto (ICR) / Manual				
Backlight Compensation	BLC / HLC / WDR 120dB				
White Balance	Auto/Manual				
Gain Control	AGC				
Noise Reduction	2D/3D				
Smart IR	Auto / Manual				
Lens					
Lens Type	Motorized Lens				
Mount Type	Board-in				
Focal Length	3.7 - 11mm				
Max. Aperture	F1.9				
Viewing Angle	H: 114.3° ~ 47.2° V: 61.7° ~ 26.8°				
Pan/Tilt/Rotation	Pan: 0° ~ 360°; Tilt: 0° ~ 78°; Rotation: 0° ~ 360°				
DORI Distance	Lens	Detect	Observe	Recognize	Identify
	W	58m(189ft)	23m(75ft)	12m(38ft)	6m(19ft)
	T	131m(429ft)	52m(172ft)	26m(86ft)	13m(43ft)
Video					
Frame Rate	25/30fps at 4MP, 25/30fps at 1080P				
Resolution	4MP (2592×1944)				

*Design and specifications are subjects to change without notice.



INSNCTO4WCA

4.1 MP HD over Coax Turret Camera with IR

Product Specifications

Port	
Video Output	1-channel BNC high definition video output / CVBS video output (Can switch)
Audio Interface	1-ch & Built-in microphone
General	
Power Supply	AC 24V±30% / DC 12V±30%
Power Consumption	Less than 10.3W
Working Environment	-30°C to +60°C (-22°F to +140°F) / Less than 90% RH
Protection	IP67
Dimensions	Φ122mm × 107mm (Φ4.8" × 4.2")
Weight	1.39 lbs (0.63 kg)



*Design and specifications are subjects to change without notice.



INSNCT04WCA

4.1 MP HD over Coax Turret Camera with IR

Product Specifications

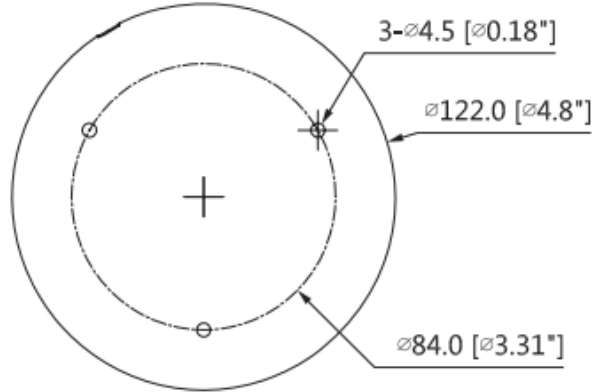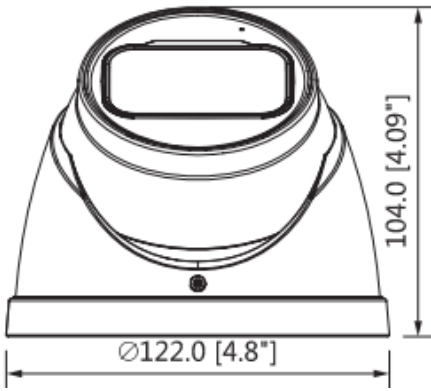




INSX130
Junction Box



INSX203
Wall Mount



INSX152
Pole Mount

Junction Mount	Pole Mount
INSX130	INSX203 + INSX152
	
Wall Mount	
INSX203	
	

*Design and specifications are subjects to change without notice.

