



NDAA 20MP 360 CAMERA (4x5MP)

Model: INXD020360IRWA



The multilens camera delivers high-quality images with its 5.69MP, 1/2.8" CMOS sensor and 2592 x 1944 resolution. It supports H.265 & H.264 encoding for efficient video compression. With IK10 & IP67 certifications, it is resistant to vandalism and suitable for outdoor use. The camera supports the ONVIF protocol for easy integration into existing security systems. Its 120dB wide dynamic range ensures clear imaging in challenging lighting conditions.

- **NDAA Compliant**
- **High quality image with 5.69MP, 1/2.8" CMOS progressive sensor**
- **2592 x 1944 resolution**
- **H.265 & H.264 encoding**
- **IK10 & IP67 Certifications**
- **Supports ONVIF protocol**
- **120dB Wide Dynamic Range**
- **Flexible sensor positioning with magnets**

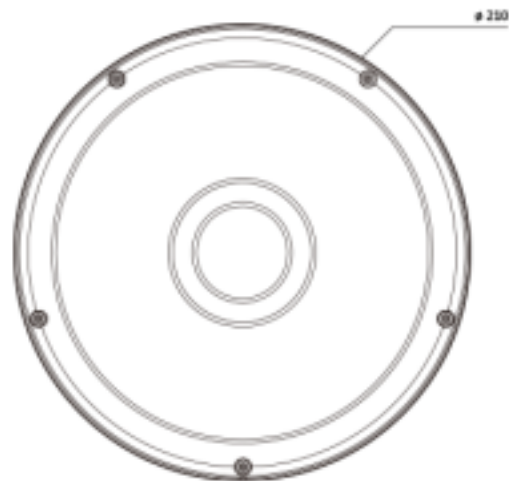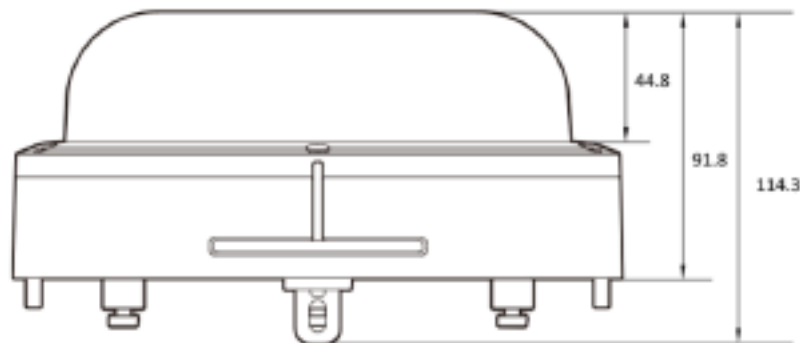

*Design and specifications are subjects to change without notice.

INXDO20360IRWA | NDAA 20MP 360 CAMERA

Camera	
Image Sensor	1/2.8" 5.69MP CMOS; Flexible sensor positioning with magnets
Channels	4
Total Pixel	2704(H) x 2104(V)
Max Resolution	2592(H) x 1944(V)
Min. Illumination	Color: 0.1 Lux; BW: 0.05 Lux
Only installer Video Output	1 [CVBS 1.0V p-p (75 Ω)]
S/N (signal/noise) Ratio	50dB
Scanning Mode	Progressive Scan
Lens	
Focal Length	2.8mm - 8mm
Aperture	F1.6
Lens Type	Motorized Lens
IRIS Type	Auto Exposure
Horizontal Angle	D: 64 - 119 / H:51 - 93 / V: 39 - 68
Pan / Tilt / Zoom	Optical Zoom: 2.8x
Operational	
Shutter Speed	Auto / Manual (1/15 - 1/32,000); Anti-Flicker; Slow Shutter
Auto Gain Control	Auto
Day & Night	TDN (True Day & Night)
Digital Noise Reduction	3D DNR
Wide Dynamic Range	120dB or above (2x)
LEDs	Non-IR
LED Distance	No
Privacy Zone	Yes
Function	Motion Detection; Mirror & Flip
Encoder	
Video Compression	H.265; H.264; MJPEG
Resolution	H.265: 2592x1944 / 2560x1440 / 1920x1080 / 704x576 / 640x480 (4ch) H.264: 2592x1944 / 2560x1440 / 1920x1080 / 704x576 / 640x480 (4ch) MJPEG: 1920x1080 / 1280x720 / 800x600 / 768x432 / 704x576 (4ch)
Intelligent Codec	Yes
Multiple Profile Streaming Performance	4 Triple Streaming (3rd only MJPEG)
Video BitRate	100Kbps-10Mbps
BitRate Control	Multi Streaming CBR/VBR at H.265 (Controllable Frame Rate and Bandwidth)
Video BitRate extra comment	Multi-Rate for preview and Recording
Audio Compression	G.711 ulaw
Special Feature	Dynamic Region of Interest

*Design and specifications are subjects to change without notice.

INXDO20360IRWA | NDAA 20MP 360 CAMERA

I/O & Event	
Audio In/Out	1 Line [1.0Vms, 3K ohm] / 1 Line
Alarm In/Out	1 Line/1 Line
Microphone	No
Event Trigger	Motion Alarm, Network Disconnection, Temperature Critical, Illegal Login, Schedule, Sensor Detection
Event Notification	FTP; E-mail; Alarm Out; SD Card
Network	
Ethernet	RJ45 (1000Base-T(1Gbps))
Protocol	TCP/IP; UDP; AutoIP; TRP(UDP/TCP); RTSP; NTP; HTTP; HTTPS; SSL; DNS; DDNS; DHCP; FTP; SMTP; ICMP; SNMPv1/v2/v3(MIB-2); ONVIF
Security	HTTPS(SSL); IP Filtering; 802.1x; Digest Authentication
Application Programming	CGI; API; ONVIF
Web Viewer	MS Edge; Google Chrome
VMS	Arkiv
Edge Storage	MicroSD; MicroSDHC; MicroSDXC
SD Card Socket	4
General	
Power Supply	Adaptor is not included; DC 12V; PoE IEEE 802.3 bt Class5
	DC Max: 28W; PoE Max: 31W
Operating Temperature	-20°C to 50°C / 10-90% RH (Non-Condensing)
Certification	FCC; CE; ROHS; UL
Material	Aluminum-Die Casting
Ingress protection	IP67, IK10
Color	White
Dimensions	210mm x 92mm
Weight	1.9kg

*Design and specifications are subjects to change without notice.

INXDO20360IRWA | ACCESSORIES

Model: XLGBW16

- **Placement:** Wall
- **Material:** Aluminum-Die Casting
- **Color:** White
- **Dimensions:** 310mm (D) x 231mm (H)
- **Weight:** 3.2kg




Model: XLGBR03

- **Placement:** In-Ceiling
- **Material:** Steel Sheet
- **Color:** White
- **Dimensions:** 315mm (W) x 84.6mm (H)
- **Weight:** 1.3kg



Model: XLGBC06

- **Placement:** Ceiling
- **Material:** Aluminum-Die Casting
- **Color:** White
- **Dimensions:** 225mm (W) x 60mm (H)
- **Weight:** 1.3kg



*Design and specifications are subjects to change without notice.