

LEGENDNX

LGNXK8N4CT2TB

**NX Kit: 8 Channel 2 TB 4K NVR
Bundle with 4.1MP Black Turrets**



In short

This comprehensive security camera kit includes four advanced 4MP surveillance cameras with smart target recognition, ChromaView 24/7 color imaging, 120 dB True WDR, and built-in microphones for clear audio monitoring, ensuring precise and efficient detection in any environment. The 8-channel NVR supports up to 8MP resolution, AI-powered features like SMD, perimeter protection, and face detection, and offers seamless ONVIF/RTSP compatibility with 4K HDMI output, providing a reliable and future-proof security solution.



Camera : **LGNXT04CVLWFB**
**4.1MP CHROMAVIEW Fixed Turret
Network Camera**

- 4MP High-Resolution Imaging
- Smart Target Recognition of humans & vehicles powered by deep learning
- ChromaView: 24/7 Colour Imaging
- 120 dB true WDR Technology
- IP67: Water and dust resistant
- Advanced H.265+ Compression
- Built-in Microphone



NVR : **LGNX884KLN2T**
8 CHANNELS 4K NVR WITH 8 POE/2TB

- 8-Channels IP Video input, up to 8MP (4K)
- AI by Camera: SMD, perimeter protection, face detection, etc.
- Incoming & Outgoing bandwidth: 80Mbps
- Supports ONVIF & RTSP protocols
- VGA/HDMI Simultaneous video output, maximum resolution of HDMI is 4K
- H.265+/H.265



*Design and specifications are subjects to change without notice.

Technical Specifications

Camera: LGNXT04CVLWFB - 4.1MP CHROMAVIEW Fixed Turret Network Camera

Camera	
Image Sensor	1/2.7 4MP Progressive Scan CMOS Sensor
Minimum Illumination	0.003 Lux @ (F1.0, AGC ON), 0 Lux with Warm light on
Illuminated Reach	30m (Warm Light)
Embedded Features	Built-in Mic, Smart Illumination, ChromaView 24/7 color imaging
External Features	DC12V $\pm$ 25%
Viewing Angle	Pan: 0° ~ 360° Tilt: 0° ~ 75° Rotation: 0° ~ 360°
Lens	
Focal Length	2.8 mm
Aperture	F1.0
Field of View	2.8 mm: Horizontal FOV: 101°, Vertical FOV: 54°, Diagonal FOV: 120°
Lens Mount	M12
Camera Image	
Maximum Resolution	4MP (2688 x 1520)
Frame Rate	Main Stream
	50Hz: 25fps 4M (2688 x 1520), 25fps 3M (2304 x 1296), 25fps 1080P (1920 x 1080) 60Hz: 30fps 4M (2688 x 1520), 30fps 3M (2304 x 1296), 30fps 1080P (1920 x 1080)
	Sub Stream
	50Hz: 25fps 720P (1280 x 720), 25fps D1 (704 x 576), 25fps CIF (352 x 288) 60Hz: 30fps 720P (1280 x 720), 30fps D1 (704 x 480), 30fps CIF (352 x 240)
	Third Stream
	50Hz: 25fps CIF (352 x 288), 60Hz: 30fps CIF (352 x 240)
Image Calibration	Brightness / Contrast / Hue / Saturation / Sharpness
Shutter Time	Auto/Manual, 1/3 ~ 1/100000s
Day/Night	IR cut filter with auto switch
Wide Dynamic Range	120dB
Digital Noise Reduction	3D DNR
Supported Features	Backlight Compensation (BLC), Highlight Compensation (HLC), Region of Interest (ROI), Rotation
Compression	
Video Compression	H.265+ / H.265 / H.264+ / H.264 / MJPEG
H.265 Codec Profile	Main Profile
H.264 Codec Profile	Base / Main / High profile
Video Bit Rate	11 Kbps ~ 16 Mbps
Video Stream	Triple
Audio Compression	G.711A, G.711U
Audio Bit Rate	64 Kbps


*Design and specifications are subjects to change without notice.

Technical Specifications

Camera: LGNXT04CVLWFB - 4.1MP CHROMAVIEW Fixed Turret Network Camera

Intelligent Features	
Standard Events	Motion detection, Video Tampering
Advanced Events	Line Crossing Detection, Area Intrusion, Monitoring entry and exit for specific regions (supports alarm triggering by specified target types: human and vehicle)
Network	
Network Storage	NAS (NFS, SMB/CIFS)
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, IGMP, UPnP, SMTP, UPnP-TM, P2P
System Compatibility	Onvif (Profile S, Profile G, T), CGI
Security	User authentication, IP address filtering, and privacy masking.
Users	Maximum 10 users
Web Browsers	Internet Explorer 10 and 11 need a plug-in for live view support. Chrome 57.0+ and Firefox 52.0+ are required for local service
Mobile Surveillance	iOS, Android
Hardware	
Ethernet	1 RJ45 10 M/100 M self-adaptive Ethernet port
Storage	Up to 256GB
Microphone	Supported
NDAA Compliant	Completely
General	
Working Conditions	-40°C ~ 60°C (-40°F ~ 140°F) Humidity 95% or less (non-condensing)
Power Supply	DC12V ± 25% / PoE (802.3 af)
Power Consumption	Less than 5.5W
Protection Level	IP67
Material	Metal
Dimensions	Φ103.5 x 82.4 mm / Φ4.07" x 3.35"
Weight	0.99lb / 440g

Dimensions

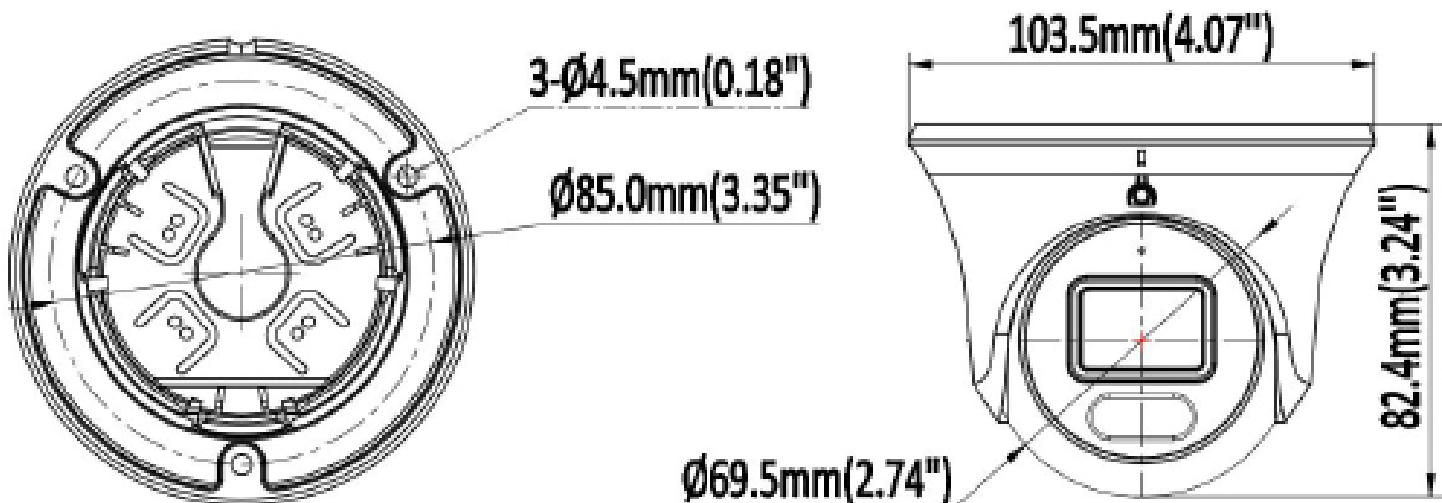

*Design and specifications are subjects to change without notice.

What you may need



XLGNXLB10B
Junction Box
Φ112.5 mm × 49.5mm



XLGNXPM03
Pole Mount
Φ170mm × 135.8mm × 43.7mm




XLGNXLB14CB
Wall Mount
Φ120mm × 105.8mm x 183.5mm




XLGNXCM700
Pendant Mount Bracket
Φ116 mm × 734.5 mm

Accessories Mount


XLGNXLB10

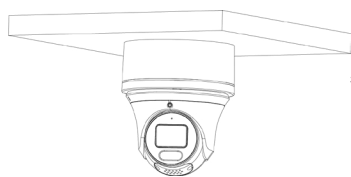


XLGNXLB14C




**XLGNXLB10 +
XLGNXLB14C**



**XLGNXLB10 +
XLGNXCM700**




XLGNXPM03




**XLGNXPM03 +
XLGNXLB10**



**XLGNXPM03 +
XLGNXLB14C**



**XLGNXPM03 + XLGNXLB10 +
XLGNXLB14C**



*Design and specifications are subjects to change without notice.

Technical Specifications

NVR: LGNX884KLN2T 8 Channels 4K NVR with 8 POE/ 2TB

Video and Audio Input	
IP Video Input	8-Channels
Audio Input	1-Channel, RCA
Video and Audio Output	
HDMI	1-Channel, Resolution : 4K (3840×2160) /30Hz, 1920 × 1080/60Hz,1280 × 1024/60Hz, 1280 × 720/60Hz
VGA	1-Channel, Resolution: 1920×1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz
Audio Output	1-Channel, RCA
Recording	
Compression	H.265+/ H.265/ H.264+/ H.264
Resolution	8MP / 5MP / 4MP / 3MP / 1080P / 720P / D1 / CIF / QCIF
Bit Rate	64Kbps ~ 10Mbps
Playback and Backup	
Playback Resolution	8MP / 5MP / 4MP / 3MP / 1080P / 720P / D1 / CIF / QCIF
Decoding	1-Channel, 8MP @ 30fps 2-Channels, 6MP @ 30fps 2-Channels, 5MP @ 30fps 3-Channels, 4MP @ 30fps 6-Channels, 1080P @ 30fps
Synchronous Playback	8-Channels
Playback Mode	Smart Playback: Enhanced playback with advanced search features, such as motion or object detection for faster review
	Normal Playback: Standard, continuous playback of recorded footage
	Segmented Playback: Splits recorded footage into time segments for easier navigation
	Tagged Playback: Allows playback of video segments that have been labeled or tagged for easy access
	Event Playback: Focuses playback on recorded events like motion detection or alarms
	Log Playback: View recorded footage
Backup Mode	USB Device / Network
Advanced Features	
Smart Detection	Area intrusion, line crossing, region entry/exit, rapid movement, missing object, unattended object, loitering detection, parking detection, face detection, crowd gathering detection, blur detection, scene change detection, audio anomaly detection, human detection, vehicle detection, SMD (Smart Motion Detection), perimeter protection (PP).
Smart Playback	Face detection / Line crossing / Area intrusion / Motion detection / Human detection / Vehicle detection
Cloud Storage	Supported
Cloud Upgrade	Supported
Network	
Incoming Bandwidth	80 Mbps
Outgoing Bandwidth	80 Mbps
Ethernet	1 RJ-45 10 /100 Mbps self-adaptive Ethernet interface
Network Compatibility	HTTPs, HTTP, TCP/IP, IPv4, UPnP, RTSP, UDP, SMTP, SNMP, NTP, DHCP, DNS, IP Filter, DDNS, FTP, P2P, ONVIF
Smart Phone	IOS (iPhone, iPad) , Android (Phone, Pad)


*Design and specifications are subjects to change without notice.

Technical Specifications

NVR: LGNX884KLN2T 8 Channels 4K NVR with 8 POE/ 2TB


Hard Disk	
SATA	1 SATA interface
Capacity	Up to 14TB capacity for each HDD
External Interface	
POE Interface	8 independent 10 /100Mbps PoE Ethernet interfaces
USB Interface	Front panel: 1 × USB 2.0, Rear panel: 1 × USB 2.0
POE Power	96W (each PoE port is max 30W)
General	
Power Supply	DC48V 2.5A
Power Consumption	≤15W (without HDD and POE)
Working Environment	-10°C ~ +55°C / 10% ~ 90% RH
Dimension (W×D×H)	250 x 230 x 45 mm (9.84" x 9.06" x 1.77")
Weight	3.74 lb / 1.7 Kg

Dimensions

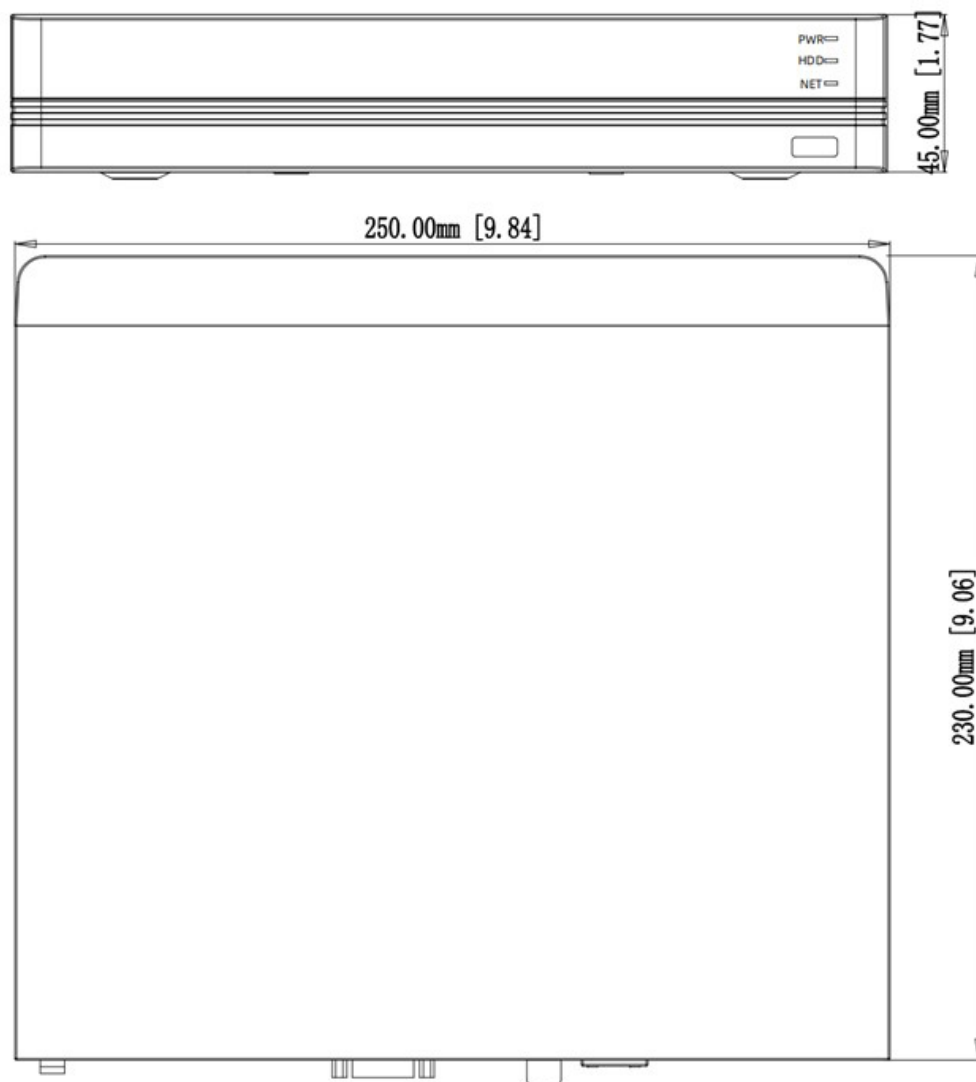

*Design and specifications are subjects to change without notice.

Rear Panel

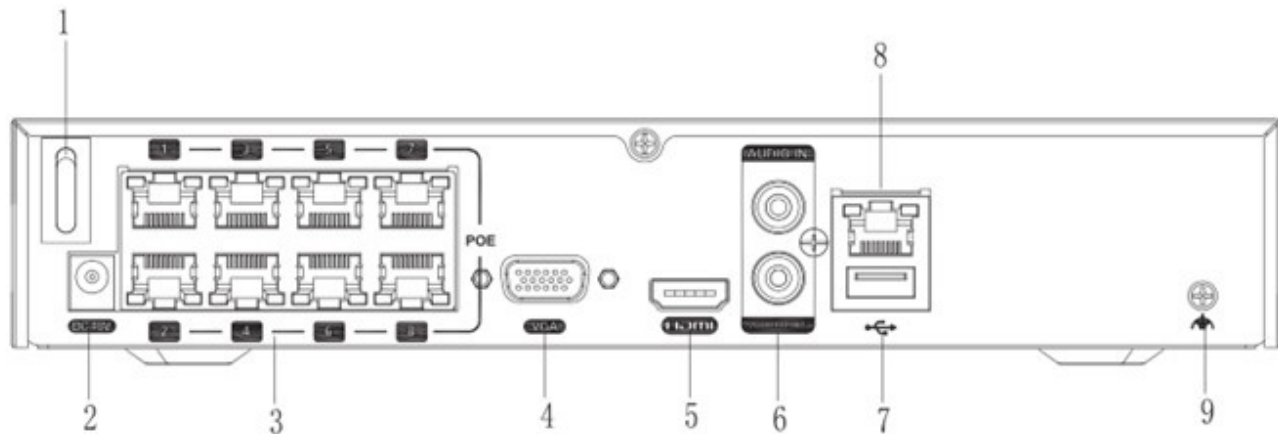

Part	Name	Part	Name
1	Power Switch	6	Audio IN/OUT RCA
2	Power Input	7	USB Port
3	POE Network Port	8	Network Port
4	VGA Port	9	Ground
5	HDMI Port		

*Design and specifications are subjects to change without notice.