

LEGEND^{NX}

LGNXT04KIQWA

4K Turret Network Camera with IQ, Motorized Lens


- 8MP High-Resolution Imaging
- High IQ: Extreme AI Analytics
- Improve human and vehicle classification using deep learning
- 120 dB true WDR Technology
- Motorized varifocal lens for quick, remote zoom and focus adjustments
- Water and dust resistant (IP67)
- Built-in microphone, audio & alarm interface
- Advanced H.265+ Compression



In short

8MP high-resolution camera with extreme AI analytics for enhanced human and vehicle classification. Equipped with 120 dB WDR technology, motorized varifocal lens, IP67 water and dust resistance, built-in microphone, audio/alarm interface, and advanced H.265+ compression.

Dimensions

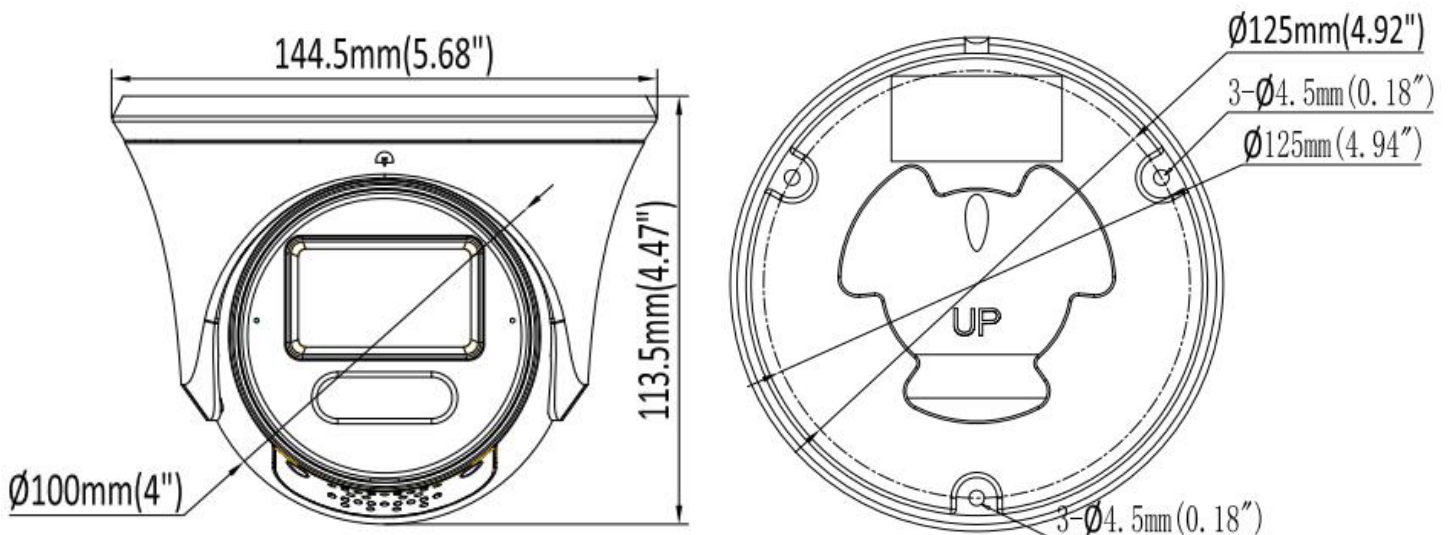

*Design and specifications are subjects to change without notice.

Technical Specifications

Camera: LGNXT04KIQWA				
Image Sensor	1/2.8" Progressive Scan CMOS Sensor			
Minimum Illumination	Color: 0.006 Lux, 0 Lux with IR On			
Illumination Distance	40m / 131.23ft (IR light)			
Strobe Light	Supported			
Smart IR	Supported			
Pan / Tilt / Rotation Range	Pan: 0° ~ 360° Tilt: 0° ~ 75° Rotation: 0° ~ 360°			
Lens				
Focal Length	2.7 ~ 13.5 mm			
Aperture	F1.6			
Field of View	2.7 ~ 13.5 mm: Horizontal FOV: 108° ~ 34°, Vertical FOV: 58° ~ 19°, Diagonal FOV: 130° ~ 39°			
Lens Mount	Φ 14			
DORI 2.7 ~ 13.5 mm	Detect	Observe	Recognize	Identify
	93-274m	36.3-108.1m	18.2-54.4m	9.1-27.2m
Camera Image				
Maximum Resolution	8MP (3840 × 2160)			
Main Stream	50Hz: 25fps 8MP (3840 × 2160), 25fps 6MP (3200 × 1800), 25fps 5MP (3072 × 1728), 25fps 4MP (2560 × 1440), 25fps 1080P (1920 × 1080)			
	60Hz: 30fps 8MP (3840 × 2160), 30fps 6MP (3200 × 1800), 30fps 5MP (3072 × 1728), 30fps 4MP (2560 × 1440), 30fps 1080P (1920 × 1080)			
Sub Stream	50Hz: 25fps 720P (1280 × 720), 25fps D1 (704 × 576), 25fps CIF (352 × 288) (Default D1)			
	60Hz: 30fps 720P (1280 × 720), 30fps D1 (704 × 480), 30fps CIF (352 × 240)			
Third Stream	50Hz: 25fps CIF (352 × 288)			
	60Hz: 30fps CIF (352 × 240)			
Image Setting	Brightness / Contrast / Saturation / Hue / Sharpness			
Shutter Time	Auto/Manual, 1/3 ~ 1/100000s			
Day/Night	IR Cut filter			
Wide Dynamic Range	120 dB			
Digital Noise Reduction	2D/3D DNR			
BLC	Supported			
HLC	Supported			
ROI	Supported			
Rotate	Supported			
Compression				
Video Compression	H.264 / H.264+ / H.265 / H.265+ / MJPEG			
H.264 Codec Profile	Base / Main / High profile			
H.265 Codec Profile	Main Profile			
Video Bit Rate	11 Kbps ~ 16 Mbps			
Triple Streams	Supported			
Audio Compression	G.711A, G.711U			
Audio Bit Rate	64 Kbps			

*Design and specifications are subjects to change without notice.

Technical Specifications

Smart Features	
Basic Events	Motion detection, Video Tampering
Smart Events	Line crossing detection, area intrusion, Monitoring entry and exit for specific regions (support alarm triggering by specified target types (human and vehicle) and Scene Alteration Detection
Face Detection	Supported
Network	
Network Storage	NAS (NFS, SMB/CIFS), ANR
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, IGMP, UPnP, SMTP, UPnP-TM, P2P
System Compatibility	Onvif (Profile S, Profile G, T), SDK
Security	Password protection, complicated password, HTTPS encryption, IP address filter, basic and digest authentication for HTTP/HTTPS, TLS 1.1/1.2, WSSE and digest authentication for Open Network Video Interface
Users	Maximum 40 users
Web Browsers	Plug-in required live view: IE 10, IE 11 Local service: Chrome 57.0+, Firefox 52.0+
Mobile Surveillance	iOS, Android
Hardware	
Communication interface	1 RJ45 10 M/100 M self-adaptive Ethernet port
Storage	Up to 256GB
Microphone	Supported
Speaker	N/A
Audio I/O	1/1
Alarm I/O	1/1
Reset button	Supported
General	
Operating Conditions	-40°C ~ 60°C (-40°F ~ 140°F) Humidity 95% or less (non-condensing)
Power Supply	DC12V ± 25%
PoE	PoE (802.3 af)
Power Consumption	Less than 11W
Protection Level	IP67
Material	Metal
Dimensions	Φ 144.5 × 113.5 mm (Φ 5.68" × 4.47")
Gross Weight	2.43lb / 1100g

*Design and specifications are subjects to change without notice.

What you may need



XLGNXLB12C
Junction Box
Φ142 mm × 46.5mm



XLGNXPM03
Pole Mount
Φ170mm × 135.8mm × 43.7mm




XLGNXLB07C
Wall Mount
Φ136mm × 120mm x 208mm




XLGNXCM700
Pendant Mount Bracket
Φ116 mm × 734.5 mm

Accessories Mount


XLGNXLB12C




XLGNXLB07C




**XLGNXLB07C +
XLGNXLB12C**



**XLGNXLB12C +
XLGNXCM700**




XLGNXPM03




**XLGNXPM03 +
XLGNXLB12C**



**XLGNXPM03 +
XLGNXLB07C**



**XLGNXPM03 + XLGNXLB12C +
XLGNXLB07C**



*Design and specifications are subjects to change without notice.