



12VDC at 5.5 Amps Power Supply


- Designed for quick installation
- Individually protected, electronically fused outputs
- Short circuit isolation technology for uninterrupted operation
- Class 2, Power limited outputs
- Removable output terminal blocks for quick installation
- Diagnostic LEDs for quick troubleshooting
- Automatic switch over to stand-by battery
- AC line cord included
- 4 outputs
- Battery Charger
- UL/ULC listed to UL60950 Information Technology

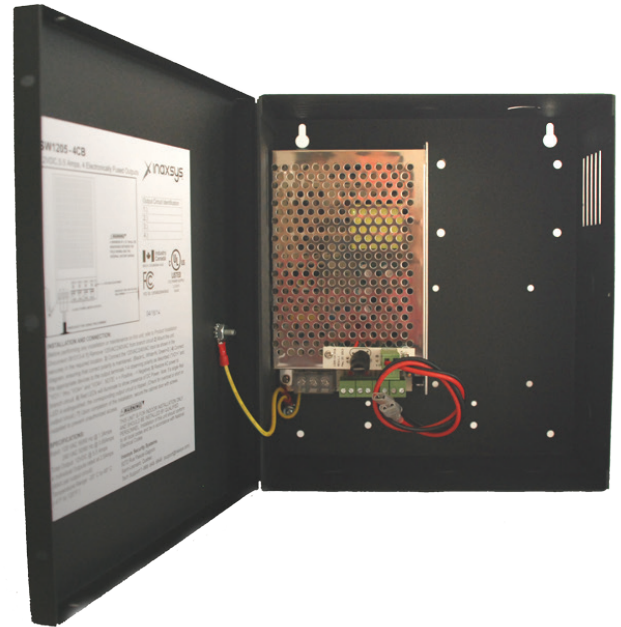


Application

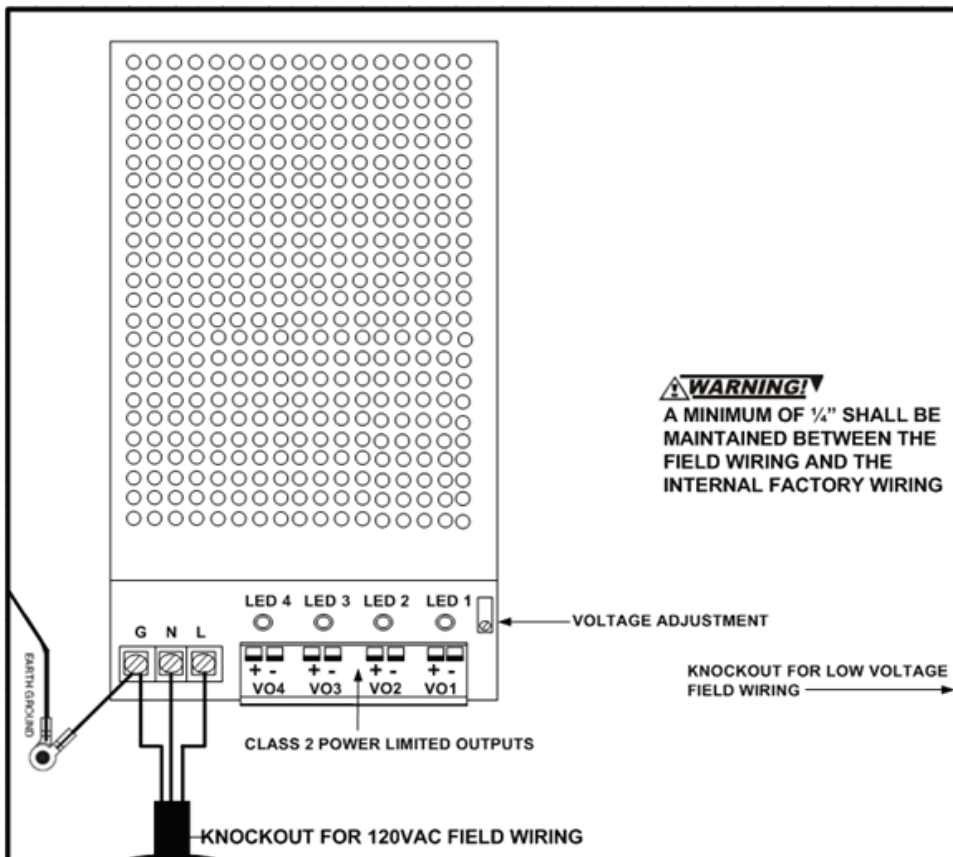

Output Terminal Block for circuits 1-4 and Voltage

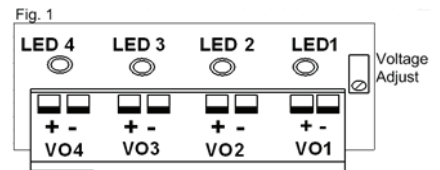

AC power input



Industry Canada
REG# 13EAB02004-0542

FCC
FCC ID: 13FAB020040542

UL US
LISTED
I.T.E POWER SUPPLY
E220695
6AA8

Keep .25" spacing between power-limited wiring and non power-limited wiring

Technical Specifications

System	
Power Output	12VDC at 5.5 Amps
Maximum Temperature	-20° C to 40° C; (For indoor use only)
Maximum Battery Charge	500mA (Subtract from total output)
Individual Outputs Current	Limited at 2.5 Amps per circuit.
Maximum Ripple/Noise	Ripple: 150mVp-p; Noise: 200mVp-p
Relative Humidity	20% - 90%
Certifications	UL/ULC listed to UL60950 Information Technology Equipment; FCC PART 15, ICES 003-2012; CE/LVD EN60950-1; CE/EMC:EN55022,EN55024
Efficiency with full load	85%
Backup	1 battery is required for backup
Dimensions	23.3 cm x 21 cm x 9 cm (9" x 10" x 4")
Weight	2.25 kg (13 lbs)

*Design and specifications are subject to change without notice.